


RUST-OLEUM®
INDUSTRIAL



COMBICOLOR® NON ZINC

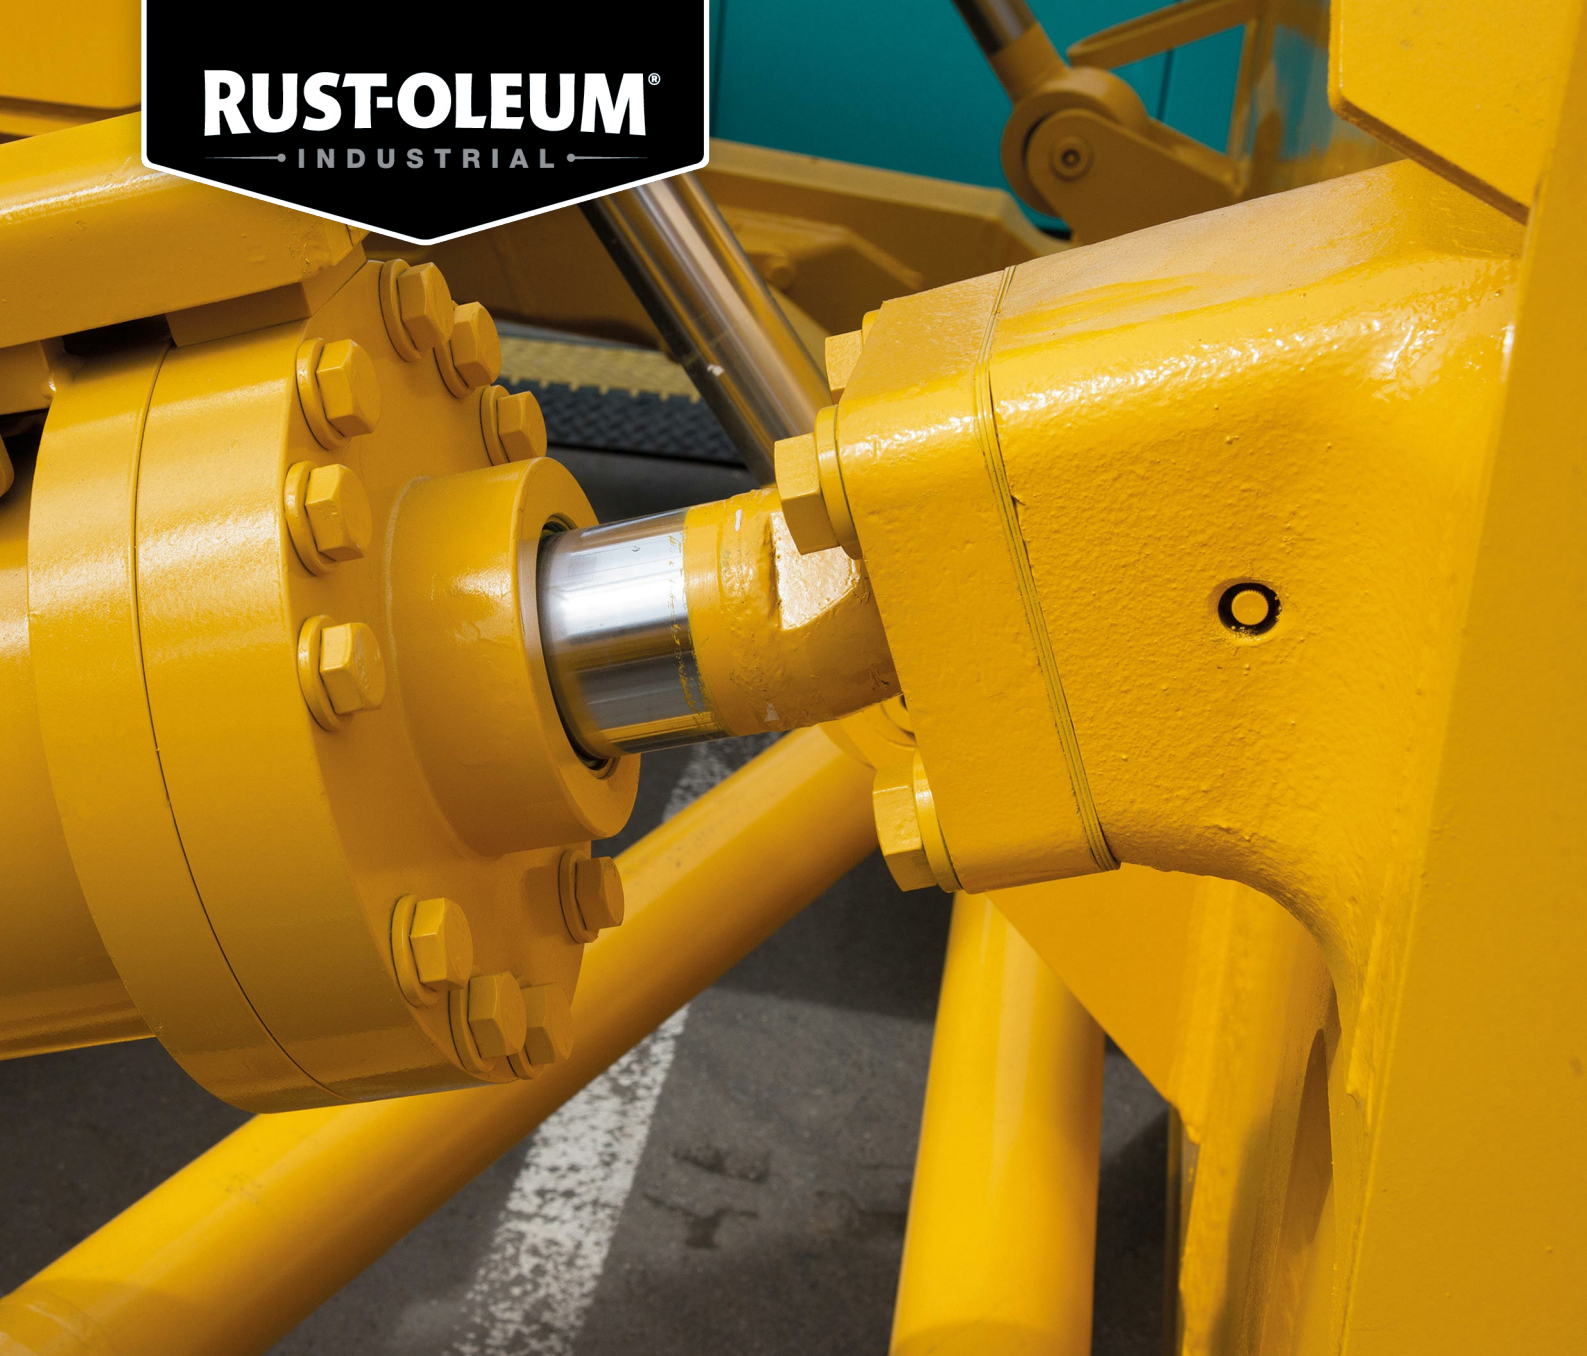

One coat system for metal protection

- Primer and topcoat in one
- For application on rust, bare metal
- High coverage: 10.3 m²/litre
- Contains zinc free anticorrosive additives
- Sag resistant, no brush strokes

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

COMBICOLOR® NON ZINC

BESKRIVELSE

RUST-OLEUM® CombiColor Non Zinc coating is primer and topcoat in one, based on a urethane modified alkyd, providing good drying properties at low temperatures. The product contains zinc-free rust-inhibitive pigments and is lead- and chromate free.

ANBEFALET BRUG

RUST-OLEUM CombiColor Non Zinc should be applied on bare, manually derusted or with CombiColor Non Zinc Primer primed steel. CombiColor Non Zinc is intended for brush and roller application and can also be applied by air spray. RUST-OLEUM CombiColor Non Zinc offers corrosion protection in a light industrial environment. For metal structures in a more aggressive industrial environment, prior application of a RUST-OLEUM CombiColor Non Zinc Primer is recommended.

ANBEFALET SYSTEM

RUST-OLEUM CombiColor Non Zinc Primer / RUST-OLEUM CombiColor Non Zinc (Gloss or Satin)

TEKNISK DATA

Tæthed:	GLOSS= 0.9-1.10 (Black - White), SATIN= 1.13-1.3 (Black - White)
Glansgrad:	Blank,Satin
Glansgrad ved 60°:	GLOSS: 95%, SATIN: 30-50%
Faststofindhold i vægt:	GLOSS 62,5± 3% - SATIN: 64± 4%
Tørstofindhold i volumen:	GLOSS 53-57% - SATIN 48-52%
Varmebestandighed:	90°C dry heat

TØRRETIDER VED 20°C/50% RELATIV LUFTFUGTIGHED

Berøringstør:	2 hours (20°C), 3 hours (10°C), 1 ½ hours (30°C)
Håndteringstør:	8 hours (20°C), 16 hours (10°C), 6 hours (30°C)
Genbehandlingstør:	16 hours (20°C), 24 hours (10°C), 8 hours (30°C)
Fuldt hærdet:	7 days (20°C), 14 days (10°C), 5 days (30°C)

ANBEFALET VÅDFILMYKKELSE

100 µm

ANBEFALET TØRFILMYKKELSE

55 µm

TEORETISK FORBRUG

10.3 m²/L at 55 µm dry, depending on colour.

PRAKTISK FORBRUG

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

FORBEHANDLING AF OVERFLADEN

Remove oil, grease and all other surface contaminations by alkaline or high pressure (steam) cleaning in combination with appropriate detergents. Remove rust scale, loose mill scale, loose rust and loose coatings by scraping and wire brushing to St 3 (ISO 8501-1 : 1988), light blast cleaning or sanding. Sand intact coatings to roughen the surface slightly. The surface must be clean and dry during application. Galvanised, Zinc and Aluminium surfaces have to be primed first with CombiPrimer Tack Coat 3302

BRUGSANVISNING

To ensure homogeneity, coating materials should be thoroughly stirred prior to use.

ANVENDELSESBETINGELSER

Temperature of air, substrate and coating material between 5 and 35°C and relative humidity below 85%. The substrate temperature must be at least 3°C above dew point.

PÅFØRING OG FORTYNDING: PENSEL

Up to 10% volume RUST-OLEUM Thinner 7301. Use natural bristles, long hair brushes.

PÅFØRING OG FORTYNDING: RULLE

Up to 10% volume RUST-OLEUM Thinner 7301. Use short nap, polyamide 6-12 mm rollers. Roller application may require 2 coats to achieve recommended dry film thickness.

PÅFØRING OG FORTYNDING: LUFTATOMISERET SPRØJTE

10-25% volume RUST-OLEUM Thinner 7301. Gravity cup and pressure cup. Tip size: 1.0 - 1.5 mm. Atomising pressure: 2 - 4 bar.

RENGØRING AF UDSTYR/SPILD

Use RUST-OLEUM Thinner 7301 or RUST-OLEUM Thinner 160.

BEMÆRKNINGER

Maximum dry film thickness per coat: 75 µm dry, equals 135 µm wet.

SIKKERHEDSDATA

VOC-færdigblanding:	477 g/l
VOC-kategori:	A/i
VOC-grænse:	500 g/l
Bemærkninger om sikkerhed:	Consult Safety Data Sheet and Safety Information printed on the can.

HOLDBARHED

Minimum of 5 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5 and 35°C.

Udstedelsesdato: 07/02/2025

Tilgængelige farver og pakningsstørrelser: Der henvises til den respektive produktside på www.rust-oleum.eu for en oversigt over aktuelle tilgængelige farver og pakningsstørrelser.

Ansvarsfraskrivelse: Oplysningerne heri er efter vores bedste overbevisning korrekte, og er afgivet i god tro, men uden garanti. Brugeren vil blive anset for at selvstændigt at have bekræftet egnetheden af vores produkter til hans/hendes egen særlige formål. Rust-Oleum Europa kan under ingen omstændigheder holdes ansvarlig for følgeskader eller hændelige skader. Produkterne skal opbevares, håndteres og anvendes under forhold, der er i overensstemmelse med Rust-Oleum Europes anbefalinger beskrevet i den nyeste udgave af databladet. Det er brugernes ansvar at sikre, at de har den opdaterede udgave. De nyeste udgaver af datablade kan downloades gratis fra www.rust-oleum.eu eller tilsendes på anmodning til vores kundeservice. Rust-Oleum Europe forbeholder sig ret til at ændre egenskaberne for sine produkter uden forudgående varsel.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T: +31 (0) 165 593 636
F: +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T: +44 (0)1914 113 146
F: +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T: +33(0) 130 40 00 44
F: +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T: +32 (0) 13 460 200
F: +32 (0) 13 460 201
info@rust-oleum.eu