


**RUST-OLEUM®**  
— INDUSTRIAL —

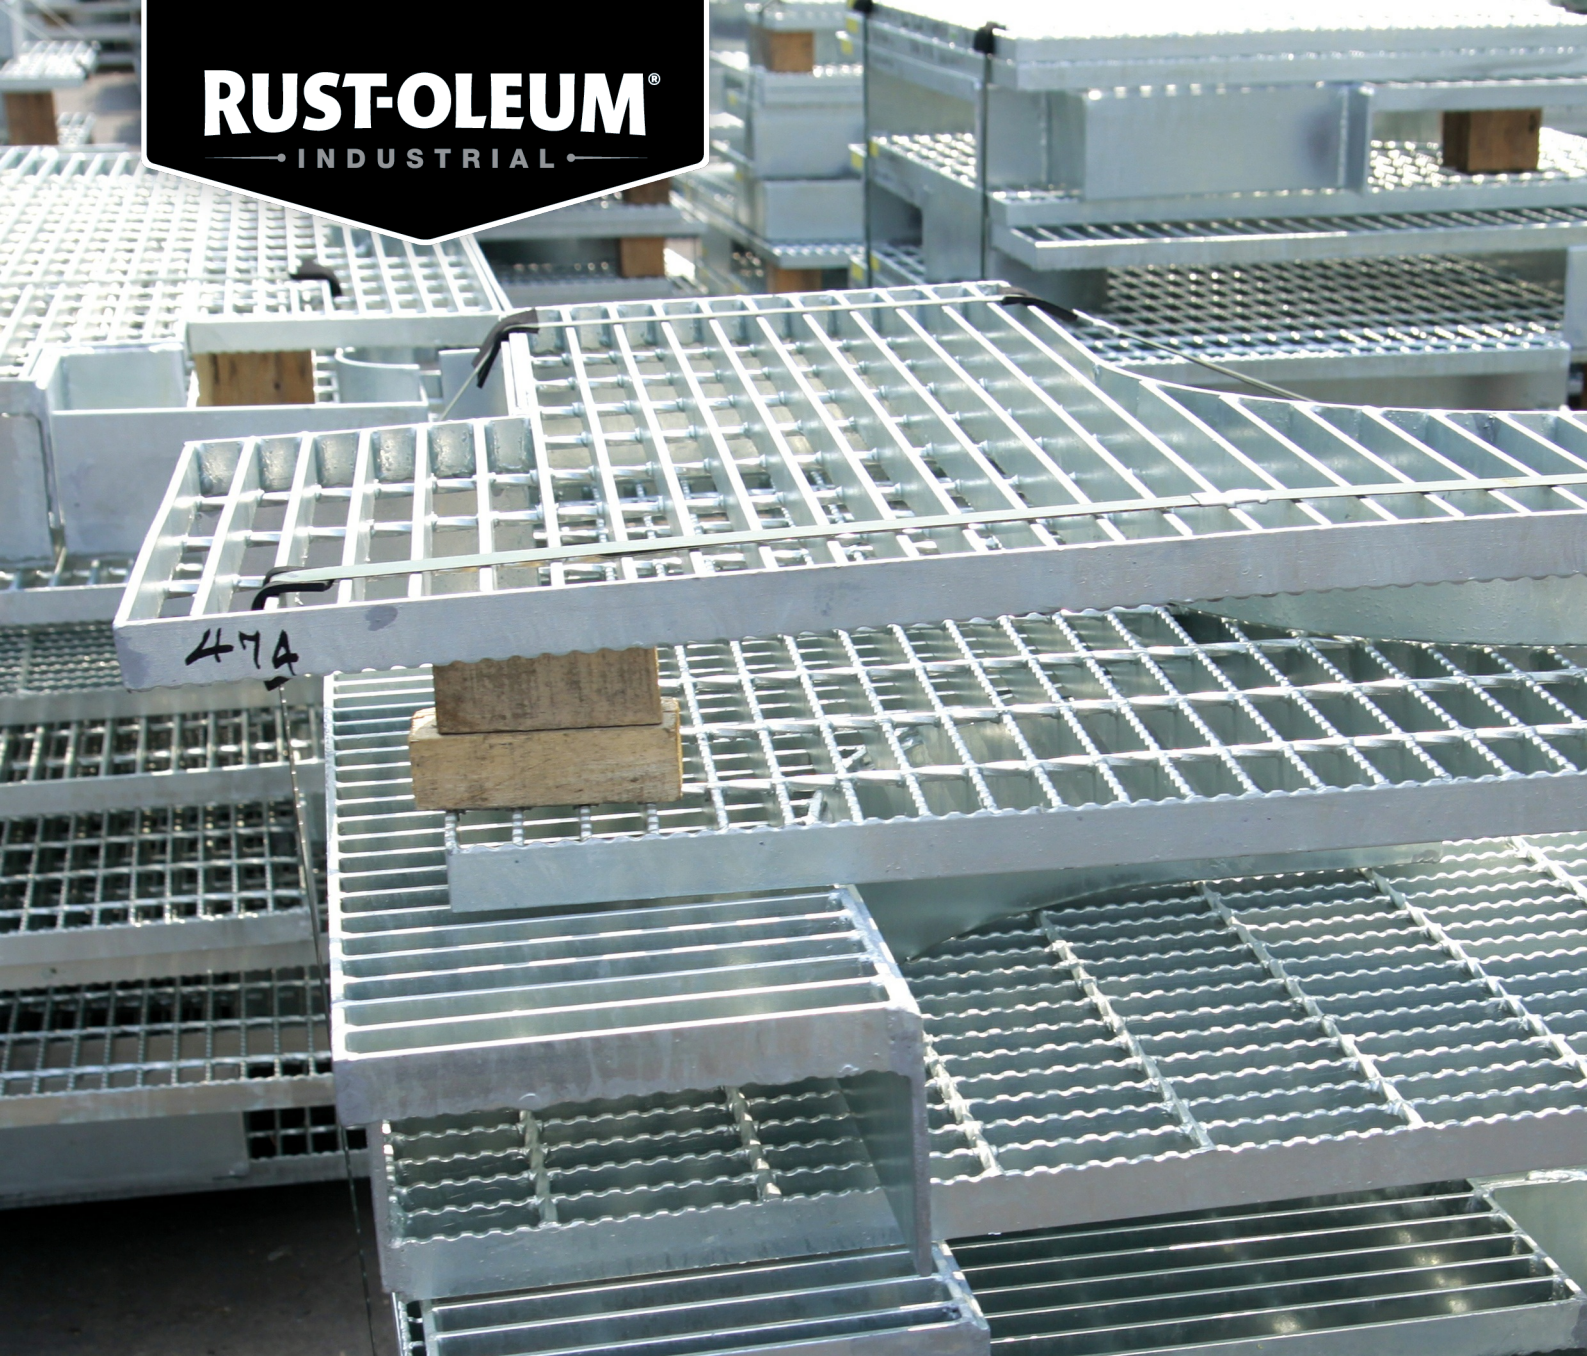

## HARD HAT® GALVA EXPRESSE

# Quick-drying protection

- Protection and quick drying in one
- Tack free after just 5 minutes, to handle after 10 minutes
- Ideal for production and construction environments
- Resists 400 hours of salt spray testing (DIN 50021 SS)

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

# HARD HAT® GALVA EXPRESSE

## BESKRIVELSE

Hard Hat® Aerosol Galva Expresse 2180 is a very fast drying zinc rich primer based on a styrene-acrylic resin. The product contains pure zinc as pigment and provides excellent protection against corrosion.

## ANBEFALET BRUG

RUST-OLEUM Galva Expresse 2180 should be used on new, bare steel or galvanised steel surfaces. RUST-OLEUM Galva Expresse 2180 is intended to be applied on small areas or for touch-up. RUST-OLEUM Galva Expresse 2180 can be recoated with non-saponifiable coatings. RUST-OLEUM Galva Expresse 2180 should be used as a primer or as a single coat in light industrial exposures, corrosive environments and high humidity areas.

## TEKNISK DATA

Glansgrad: Mat  
Varmebestandighed: 350°C (dry heat)

## TØRRETIDER VED 20°C/50% RELATIV LUFTFUGTIGHED

Berøringstør: 5 minutes  
Håndteringstør: 10 minutes  
Genbehandlingstør: Within 1 hour or after 48 hours  
Fuldt hærdet: 3 days

## ANBEFALET VÅDFILMTYKKELSE

100 µm

## ANBEFALET TØRFILMTYKKELSE

35 µm

## TEORETISK FORBRUG

1.4 m<sup>2</sup> per spray can at 35 µm dry

## PRAKTISK FORBRUG

Practical coverage depends on many factors such as porosity and roughness of the substrate and material losses during application.

## FORBEHANDLING AF OVERFLADEN

Remove dirt, grease, oil, loose rust and all other surface contaminants by appropriate means. The surface must be clean and dry during application.

## ANVENDELSESBETINGELSER

For good results the relative humidity shall be below 85% and the temperature of the can and substrate above 0°C.

## PÅFØRING OG FORTYNDING: AEROSOL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Shake frequently during use. Hold can approx. 25 cm from surface. Use back and forth motion keeping can parallel with surface. Ensure that can is in motion when spray button is pressed to avoid runs and sags. Apply a full, wet coat to achieve a close, dense coating film, avoid dry spray. After use turn can upside down and press spray button for 2 - 3 seconds to clean valve.

## BEMÆRKNINGER

Both products are lead- and chromate free thus eliminating the danger of poisonous gases escaping if the coated surface needs to be welded at a later date.

## SIKKERHEDSDATA

VOC-niveau: 645 g/l  
Bemærkninger om sikkerhed: Consult Safety Data Sheet and Safety Information printed on the can.

## HOLDBARHED

Minimum of 3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35°C.

Udstedelsesdato: 20/03/2025

**Tilgængelige farver og pakningsstørrelser:** Der henvises til den respektive produktside på [www.rust-oleum.eu](http://www.rust-oleum.eu) for en oversigt over aktuelle tilgængelige farver og pakningsstørrelser.

**Ansvarsfraskrivelse:** Oplysningerne heri er efter vores bedste overbevisning korrekte, og er afgivet i god tro, men uden garanti. Brugeren vil blive anset for at selvstændigt at have bekræftet egnetheden af vores produkter til hans/hendes egen særlige formål. Rust-Oleum Europa kan under ingen omstændigheder holdes ansvarlig for følgeskader eller hændelige skader. Produkterne skal opbevares, håndteres og anvendes under forhold, der er i overensstemmelse med Rust-Oleum Europes anbefalinger beskrevet i den nyeste udgave af databladet. Det er brugernes ansvar at sikre, at de har den opdaterede udgave. De nyeste udgaver af datablade kan downloades gratis fra [www.rust-oleum.eu](http://www.rust-oleum.eu) eller tilsendes på anmodning til vores kundeservice. Rust-Oleum Europe forbeholder sig ret til at ændre egenskaberne for sine produkter uden forudgående varsel.

### Rust-Oleum Netherlands B.V.

Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T: +31 (0) 165 593 636  
F: +31 (0) 165 593 600  
info@rust-oleum.eu

### Tor Coatings Ltd (Rust-Oleum Industrial)

Shadon Way, Portobello Ind. Estate  
Birtley, Chester-le-Street  
DH3 2RE United Kingdom  
T: +44 (0)1914 113 146  
F: +44 (0)1914 113 147  
info@rust-oleum.eu

### Rust-Oleum France S.A.S.

38, av. du Gros Chêne  
95322 Herblay  
France  
T: +33(0) 130 40 00 44  
F: +33(0) 130 40 99 80  
info@rust-oleum.eu

### N.V. Martin Mathys S.A.

Kolenbergstraat 23  
3545 Zelem  
Belgium  
T: +32 (0) 13 460 200  
F: +32 (0) 13 460 201  
info@rust-oleum.eu