


**RUST-OLEUM®**  
INDUSTRIAL



## HARD HAT® STAIN BLOCKER

# The effective solution to stains

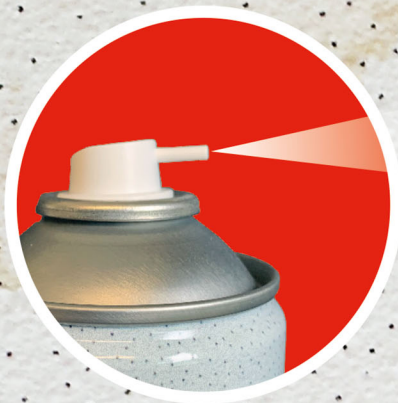

- Matt white finish, best possible opacity (Non-yellowing)
- Touch dry (in 5-10 minutes), Tack-free time: 10 min
- Overcoat time: 30 min
- For application on concrete, plaster, particle board existing coatings, wall paper etc.
- Odourless. Recoatable with standard wall paints

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

# HARD HAT® STAIN BLOCKER

## DESCRIPTION

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a matt white high-pigmented coating based on a plasticized acrylic resin for the permanent isolation of problem stains from nicotine, soot, tar and rust and the effects of moisture, graffiti and a numerous other colourings.

## DOPORUČENÉ POUŽITÍ

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a renovation paint which can be applied directly on ceilings, plaster, cement, wood, concrete, wallpaper, isolation walls, old paints, etc. RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker can be used as topcoat or can be recoated with standard wall paints.

## DRY TIMES BY 20° C/RH 50%

Dotykem suché: 5 minutes  
Suchý nátěr: Wet in wet / after ½ hour  
Plně vytvrzené: 24 hours

## TEORETICKÁ SPOTŘEBA

2,1 m<sup>2</sup> per aerosol at 30 µm dry

## PRAKTICKÁ SPOTŘEBA

Practical coverage depends on many factors such as roughness of the substrate and material losses during application.

## PŘÍPRAVA POVRCHU

Remove dirt, grease, oil, loose rust and all other surface contaminants by appropriate means. Sand intact coatings to roughen the surface slightly. The surface must be clean and dry during application.

## PODMÍNKY POUŽITÍ

For optimum results the relative humidity should be below 85% and the temperature of the can above 0°C.

## APLIKACE A ŘEDĚNÍ: AEROSOL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Shake frequently during use. Hold can approx. 25 cm from surface. Use back and forth motion keeping can parallel with surface. Ensure that can is in motion when spray button is pressed to avoid runs and sags. Apply several thin layers at a few minutes interval to achieve adequate coating thickness. After use turn can upside down and press spray button for 2 - 3 seconds to clean valve.

## SAFETY DATA

Úroveň těžkých organických  
látek: 538 g/l  
Poznámky k bezpečnosti: Consult Safety Data Sheet and Safety Information printed on the can.

## DOBA POUŽITELNOSTI

Minimum of 3 years from date of production, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35° C.

last\_updated: 20/03/2025

footer\_data\_colors\_pack\_sizes: footer\_data\_colors\_pack\_sizes.value

footer\_data\_disclaimer: footer\_data\_disclaimer.value

**Rust-Oleum Netherlands B.V.**  
Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T : +31 (0) 165 593 636  
F : +31 (0) 165 593 600  
info@rust-oleum.eu

**Tor Coatings Ltd (Rust-Oleum Industrial)**  
Shadon Way, Portobello Ind. Estate  
Birtley, Chester-le-Street  
DH3 2RE United Kingdom  
T : +44 (0)1914 113 146  
F : +44 (0)1914 113 147  
info@rust-oleum.eu

**Rust-Oleum France S.A.S.**  
38, av. du Gros Chêne  
95322 Herblay  
France  
T : +33(0) 130 40 00 44  
F : +33(0) 130 40 99 80  
info@rust-oleum.eu

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T : +32 (0) 13 460 200  
F : +32 (0) 13 460 201  
info@rust-oleum.eu