


RUST-OLEUM®
— INDUSTRIAL —

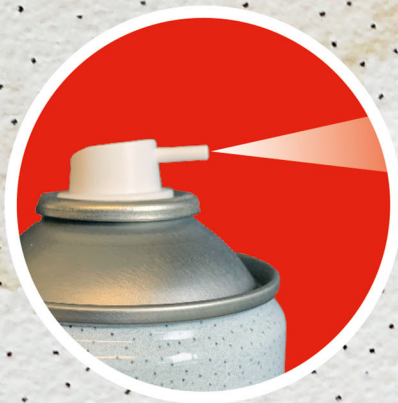

HARD HAT® STAIN BLOCKER

The effective solution to stains

- Matt white finish, best possible opacity (Non-yellowing)
- Touch dry (in 5-10 minutes), Tack-free time: 10 min
- Overcoat time: 30 min
- For application on concrete, plaster, particle board existing coatings, wall paper etc.
- Odourless. Recoatable with standard wall paints

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

HARD HAT® STAIN BLOCKER

DESCRIPTION

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a matt white high-pigmented coating based on a plasticized acrylic resin for the permanent isolation of problem stains from nicotine, soot, tar and rust and the effects of moisture, graffiti and a numerous other colourings.

RECOMMENDED USE

RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker is a renovation paint which can be applied directly on ceilings, plaster, cement, wood, concrete, wallpaper, isolation walls, old paints, etc. RUST-OLEUM® HARD HAT Aerosol 2990 Stainblocker can be used as topcoat or can be recoated with standard wall paints.

DRY TIMES BY 20° C/RH 50%

Touch dry:	5 minutes
Dry to recoat:	Wet in wet / after ½ hour
Fully cured:	24 hours

THEORETICAL CONSUMPTION

2,1 m² per aerosol at 30 µm dry

PRACTICAL CONSUMPTION

Practical coverage depends on many factors such as roughness of the substrate and material losses during application.

SURFACE PREPARATION

Remove dirt, grease, oil, loose rust and all other surface contaminants by appropriate means. Sand intact coatings to roughen the surface slightly. The surface must be clean and dry during application.

APPLICATION CONDITIONS

For optimum results the relative humidity should be below 85% and the temperature of the can above 0°C.

APPLICATION & THINNING: AEROSOL

Remove cover cap. Shake vigorously for at least one minute after the rattle of mixing ball is heard. Shake frequently during use. Hold can approx. 25 cm from surface. Use back and forth motion keeping can parallel with surface. Ensure that can is in motion when spray button is pressed to avoid runs and sags. Apply several thin layers at a few minutes interval to achieve adequate coating thickness. After use turn can upside down and press spray button for 2 - 3 seconds to clean valve.

SAFETY DATA

VOC level:	538 g/l
Remarks regarding safety:	Consult Safety Data Sheet and Safety Information printed on the can.

SHELF LIFE

Minimum of 3 years from date of production, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5° and 35° C.

Date issued: 13/05/2025

Available colours & pack sizes: Please refer to the respective product page on www.rust-oleum.eu for an overview of actual available colours and pack sizes.

Disclaimer: The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from www.rust-oleum.eu or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0)1914 113 146
F : +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu