


RUST-OLEUM®
— INDUSTRIAL —



SUPERGRIP® DECKING STRIPS

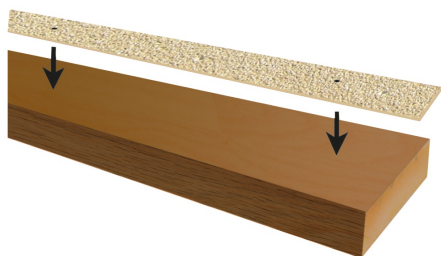

Anti-slip solution for on wood decking

- Extremely durable anti slip surface
- Easy to install
- Waterproof and Rot proof
- Pre-drilled for screw fixing (screws included)
- Choice of 3 widths

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

SUPERGRIP® DECKING STRIPS

DESCRIPTION

Quick and easy solution for dealing with slip issues associated with standard timber decking. Each decking strip is 3mm thick with each edge chamfered so as to not cause a trip hazard. The grit top surface is made from a tough hard wearing aggregate that offers extreme slip resistance in most weather conditions.

REMARKS

Each decking strip is 3mm thick with each edge chamfered so as to not cause a trip hazard. The grit top surface is made from a tough hard wearing aggregate that offers extreme slip resistance in most weather conditions.

Description:	Anti Slip Decking Strips
Design:	Pultruded fibreglass profile with pre-drilled
Size:	3mm thick, 50mm, 90mm and 120mm deep long with chamfered edges
Weight:	0.5 kg per metre
Service temperatures:	-20 to +80°C
Stock Colours:	Stone or Black
General use:	Standard pedestrian / Some vehicle traffic

Decking Strips – Pre-drilled hole configuration

50mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

90mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50 mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

120mm Wide

1200 mm – two rows of 5 holes (10 total), (6mm diameter), 50 mm in from each end and then approx. 275 mm centres. Supplied with zinc plated wood screws.

2400 mm – two rows of 5 holes (10 total), (6 mm diameter), 50 mm in from each end and then approx. 287mm centres. Supplied with zinc plated wood screws.

Date issued: 22/11/2023

Available colours & pack sizes: Please refer to the respective product page on www.rust-oleum.eu for an overview of actual available colours and pack sizes.

Disclaimer: The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the user's responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from www.rust-oleum.eu or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its products without prior notification.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0) 1914 113 146
F : +44 (0) 1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu