


RUST-OLEUM®
— INDUSTRIAL —



SUPERGRIP® SHEETING

Durable anti-slip sheeting

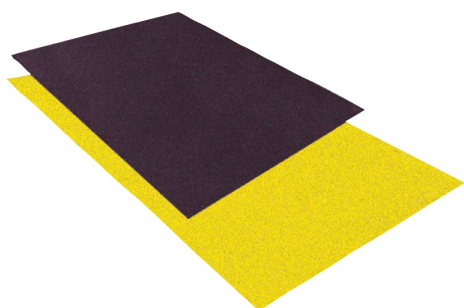

- Most durable material on the market
- We cut it to the size you need
- Easy to fix with glue and screws
- High-vis yellow or black
- For interior and exterior use

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU

SUPERGRIP® SHEETING

DESCRIPTION

Heavy duty sheets with a tough anti-slip surface. Highly versatile and long-lasting sheets for ramps, walkways, etc.

RECOMMENDED USE

Heavy duty sheets with a tough anti-slip surface. Highly versatile and long-lasting sheets for ramps, walkways, etc.

TOP FINISH: Carbon and silicon grit top surface

SURFACE PREPARATION

Very little preparation of the substrate is required. It should be reasonably clean and dry if the Adhesive Mastic is to be the only means of fixing. Badly dished or holed concrete etc should ideally be filled. The Adhesive Mastic will take up minor undulations and imperfections.

DIRECTIONS FOR USE

When installing Anti-Slip panels, standard personal protective equipment should be worn as a minimum. These include a dust mask, safety goggles, heavy-duty gloves and overalls.

Dry fit all Anti-Slip panels to ensure that they fit freely and that they sit flat down on to the surface.

Drill the fixing locating holes in all the panels. Whilst individual circumstances will vary, the following can be used as a guide:

The items are generally glued and screw fixed. Adhesive Mastic is ideal since it will make up minor deviations in the substrate and prevent the panels drumming or rocking. The Adhesive Mastic should be applied to sound, clean dry surfaces if it is to be the only method of fixing in lightly trafficked areas.

If application is to damp, dirty or friable surfaces or in very cold weather, use the Adhesive Mastic to bed the Anti-Slip panel into place and then always screw fix. Screw fixings are generally made at about 600mm intervals.

TRIMMING

The Anti-Slip material is quite tough to cut so if too much trimming is envisaged, please ask about our cut to size service. -If required, the Anti-Slip panels can be trimmed on site to suit using an industrial jigsaw and appropriate cutting blades (Bosch "T101 A1F" or similar are ideal).

FIXINGS

If mechanical fixing is required, the following may be used as a guide.

- To timber: No.8 x 30mm zinc plated or stainless steel screws.
- To steel plate: No.8 x 20mm self-tapping pan head Pozi stainless steel screws or No.8 x 20 mm self drilling pan head Philips zinc plated screws.
- To concrete: No. 8 x 30 mm zinc plated or stainless steel impact anchors (Hilti HPS-1 or similar).
- To open mesh: Stainless steel or zinc plated saddle clips and domed head bolts suitable in length for the depth of the existing treads.

COUNTERSINKING

When drilling holes in the panels we do not recommend countersinking

DRILLING

Hold the Anti-Slip panel in place and drill through the panel and into the substrate. A rawlplug will probably be required in a concrete base. The drill hole in the panel does not need to be larger than that drilled into the substrate.

PANEL WEIGHTS

Step cover: 11.3 kg

Date issued: 22/11/2023

Available colours & pack sizes: Please refer to the respective product page on www.rust-oleum.eu for an overview of actual available colours and pack sizes.

Disclaimer: The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from www.rust-oleum.eu or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0)1914 113 146
F : +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu